BCT 063 CENTRIFUGAL VENTILATOR

DUTAIR

General
Model: centrifugal ventilator. The robust ventilator body and impeller are made of die-cast aluminium alloy and are coated. Asynchronous motor according IEC-standard, fully closed and fitted with long-life ball bearings. Provided with fixed base and protection grid in inlet.

Application
Suitable for transportation of all sorts of material except those with abrasive properties. Temperature of gasses limited to 80°C.

Algemeen
Type: centrifugaalventilator. Het robuuste ventilatorhuis en de waaier zijn gemaakt uit gietaluminium en voorzien van een solide coating. De asynchrone motor voldoet aan de IEC-norm, is geheel gesloten en voorzien van duurzame kogellagers. De voet is vast en de inlaat voorzien van een rooster.

Toepassing
Inzetbaar voor transport van materiaal met uitzondering van schurende stoffen. Maximum temperatuur van het transportgas 80°C.

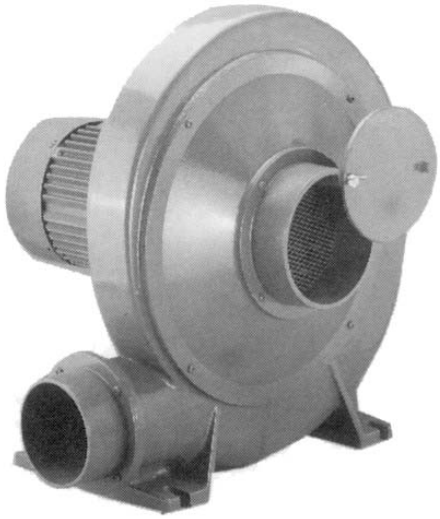

Tecnical data / Technische gegevens

Power	Vermogen		0.75	kW
Voltage 1~	Spanning	1~	230	V
3~		3~	230/400	V
Current 1~	Stroom	1~	6.5	A
3~		3~	3.2/1.7	A
Frequency	Frequentie		50	Hz
Revolutions	Toerental		2800	/min
Protection class	Bescherming		IP 54	
Noise level	Geluidsniveau		63	dB
Weight	Gewicht		25	kg
Positions	Posities		1	

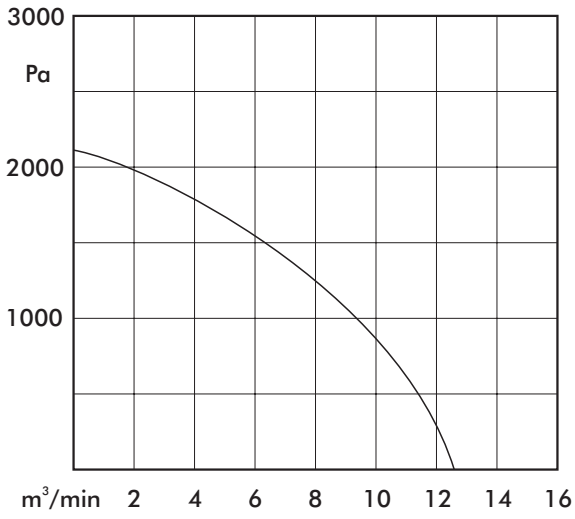

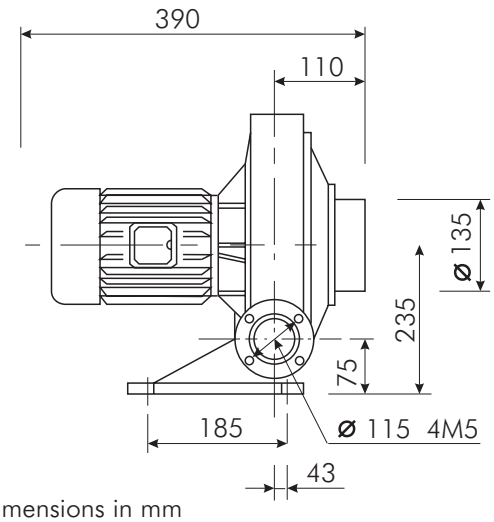

Dimensions in mm

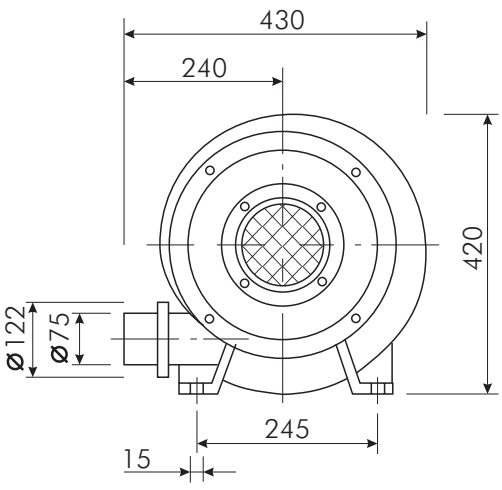

Maten in mm